

RocketRAID 2680/2684 SAS Controller

Debian Linux

Installation Guide

Version 1.0

Copyright © 2008 HighPoint Technologies, Inc.

All rights reserved.

Last updated on November 13, 2008

Table of Contents

1 Overview	1
2 Installing Debian Linux on RR2680/2684 controller	1
Step 1 Prepare Your Hardware for Installation.....	1
Step 2 Check System BIOS Settings.....	1
Step 3 Prepare the Driver Diskette.....	1
Step 4 Install Debian Linux.....	2
3 Installing RR2680/2684 driver on an Existing System.....	5
Step 1 Obtain the Driver Module	5
Step 2 Configure System to Mount Volumes when Startup	5
4 Monitoring the Driver	5
Checking Devices Status.....	5
5 Updating the Driver	6
6 Installing RAID Management Software.....	6
7 Rebuilding Driver Module for System Update.....	6

1 Overview

The purpose of this document is to provide clear instructions on how to install and use RocketRAID 2680/2684 Controller on Debian Linux system.

2 Installing Debian Linux on RR2680/2684 controller

If you would like to install DebianLinux onto drives attached to RR2680/2684 controller, please perform the following operations:

Step 1 Prepare Your Hardware for Installation

After you attach your hard disks to RR2680/2684 controller, you can use RR2680/2684 BIOS Setting Utility to configure your hard disks as RAID arrays, or just use them as single disks.

Before installation, you must remove all the disk drives, which are not physically attached to RR2680/2684 controller, from your system.

Note

If you have other SCSI adapters installed, you must make sure the RR2680/2684 controller BIOS will be loaded firstly. If not, try to move it to another PCI slot. Otherwise you may be unable to boot up your system.

Step 2 Check System BIOS Settings

In your system BIOS SETUP menu, change **Boot Sequence** in such a way that the system will first boot from floppy or CDROM, and then from SCSI. Refer to your BIOS manual to see how to set boot sequence.

If your BIOS settings do not support such a boot sequence, you can first set it to boot from floppy or CDROM. After you finish installation, set SCSI as the first boot device to boot up the system.

Step 3 Prepare the Driver Diskette

In the following document, the floppy diskette stands for the floppy diskette which is inserted into the on-board floppy controller, the USB floppy diskette stands for the floppy diskette inserted into the USB floppy controller, the USB diskette stands for USB flash disk and USB harddisk, the USB storage stands for USB diskette and USB floppy controller.

Put the driver files on a (USB) floppy diskette.

Windows:

Insert a floppy diskette into the floppy driver, create a MS-DOS filesystem and extract the archive file to the floppy diskette.

Linux:

```
# mkdosfs /dev/fd0
# mkdir -p /mnt/floppy
# mount /dev/fd0 /mnt/floppy
# tar xzvf rr268x-debian-4.0.tgz -C /mnt/floppy
# umount /dev/fd0
```

Note

If the floppy diskette is inserted into an external USB floppy controller and the device name in the linux system is **sda**, then replace **fd0** in the upper command with **sda**: (e.g.)

```
# mkdosfs /dev/sda
```

If the driver will put on a partition of a USB harddisk and the partition name in the linux system is **sdb1**, then replace **fd0** in the upper command with **sdb1**: (e.g.)

```
# mkdosfs /dev/sdb1
```


Step 4 Install Debian Linux

Insert the driver floppy diskette in the floppy drive or insert the USB diskette in to the USB port.


- 1) Start installing Debian Linux by booting from the installation CD.
- 2) On the startup screen, a prompted label "**boot:**" will appear at the bottom of the screen. Just press **Enter**.



- 3) After the installation completes "**Loading components of the Debian installer**"(debian 3.1)

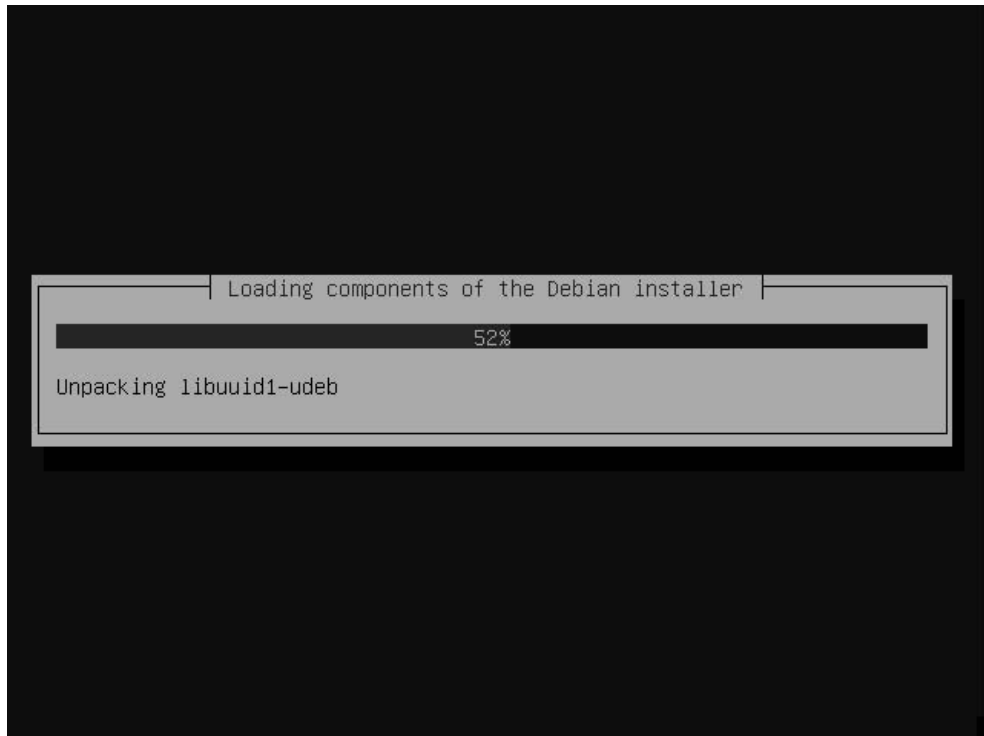

or "**Loading additional components**"(debian 4.0).

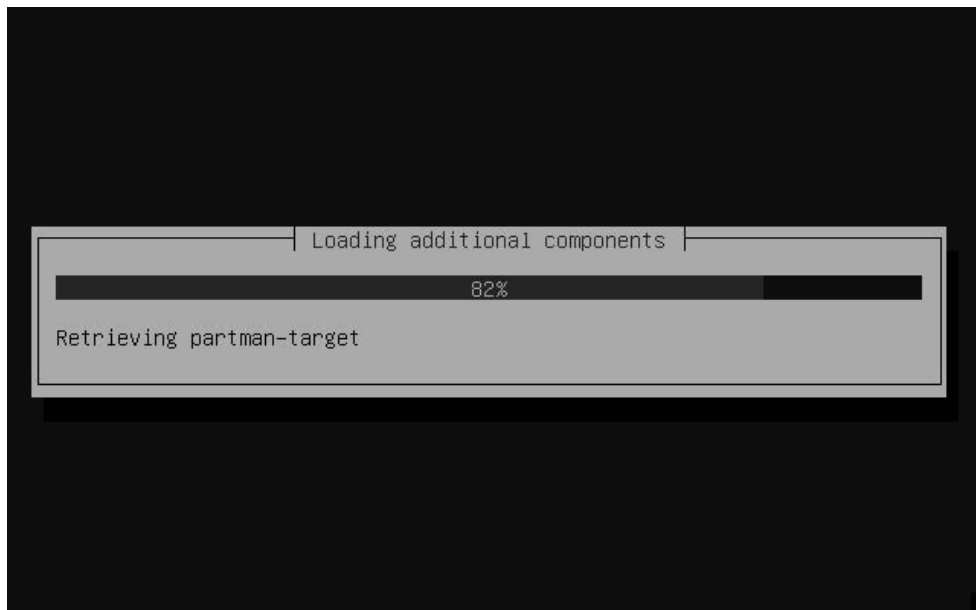

Press "**ALT+F2**" to switch to the shell on console 2. Type the following commands:


```
# mount -t vfat /dev/fd0 /floppy  
# cp -r /floppy /tmp/hptdd  
# umount /floppy
```

Unplug all USB storages from the USB port and then type:

```
# sh /tmp/hptdd/preinst.sh
```

```
~ # mount -t vfat /dev/fd0 /floppy
~ # cp -r /floppy /tmp/hptdd
~ # umount /floppy/
~ # sh /tmp/hptdd/preinst.sh
The disk you insert is for linux kernel 2.6
This step succeeded! Now you can press ALT+F1 to switch
screen!
~ #
```

- 4) Then press “**ALT+F1**” to switch back to installation screen and continue the installation as usual.
- 5) When the screen shows that “[!!] Finish the installation”,

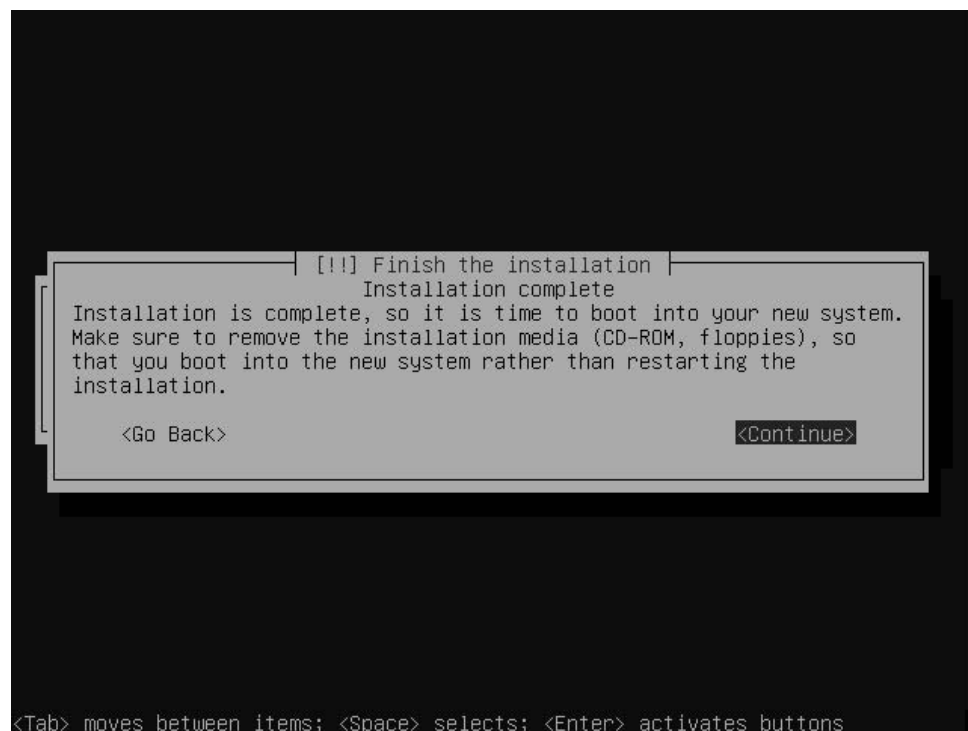

press “**ALT+F2**” to the shell and type the following commands:

```
# sh /tmp/hptdd/postinst.sh
```

A message will be displayed that the driver has been installed successfully.

```
~ # sh /tmp/hptdd/postinst.sh
The disk you insert is for linux kernel 2.6
We have completed the driver installation, you can use
installation console to finish the installation.
~ #
```

- 7) Press “**ALT+F1**” to switch back to installation screen and finish the installation.

3 Installing RR2680/2684 driver on an Existing System

Note

If you use a SCSI adapter to boot your system, you must make sure the RR2680/2684 controller BIOS will be loaded after that adapter's BIOS. If not, try to move it to another PCI slot. Otherwise you may be unable to boot up your system.

Step 1 Obtain the Driver Module

Extract the driver archive to a temporary directory and execute the **install.sh** to install the driver to the system. For example:

```
# mkdir /tmp/dd
# tar xzvf rr268x-debian-4.0.tgz -C /tmp/dd
# cd /tmp/dd
# sh install.sh
```

If the driver of previous version has been in the initrd image, the installer will update the initrd image or it will make the driver automatically loaded while system up.

Step 2 Configure System to Mount Volumes when Startup

Now you can inform the system to automatically mount the array by modifying the file `/etc/fstab`. E.g. you can add the following line to tell the system to mount `/dev/sda1` to location `/mnt/raid` after startup:

```
/dev/sda1      /mnt/raid      ext3      defaults      0 0
```

4 Monitoring the Driver

Once the driver is running, you can monitor it through the Linux proc file system support. There is a special file under `/proc/scsi/rr2680/2684/`.

Note

The file name is the SCSI host number allocated by OS. If you have no other SCSI cards installed, it will be 0. In the following sections, we will use x to represent this number.

Checking Devices Status

Using the following command to show driver status:

```
# cat /proc/scsi/rr2680/x
```

This command will show the driver version number, physical device list and logical device

list.

5 Updating the Driver

Update the driver is the same as installing driver on an Existing System, so refer to section **3 Installing RR2680/2684 driver on an Existing System.**

6 Installing RAID Management Software

HighPoint RAID Management Software is used to configure and keep track of your hard disks and RAID arrays attached to RR2680/2684 controller. Installation of the management software is optional but recommended.

Please refer to HighPoint RAID Management Software documents about more information.

7 Rebuilding Driver Module for System Update

When the system updates the kernel packages, the driver module `rr2680.ko` should be built and installed manually before reboot.

To build the driver module, the RR2680/2684 open source package and the following building packages are needed: `gcc`, `kernel-headers`. The open source package can be got from HighPoint website: <http://www.highpoint-tech.com> while the building tools can be installed from the Debian project website: <http://www.debian.org>

Note: the package version of `kernel-headers` should be the same to the version of updated kernel package.

Refer to the REAME file distributed with HighPoint RR2680/2684 open source package on how to build and install the driver module.